


Photo 1: Hal Chamberlin's home built HAL-4096 computer system, built in 1972. This system, which is still in service handling IO for an IMP-16 micro-computer system, features TTL logic, a 16 bit word length, 16 registers, 4 K bytes of magnetic core memory (a surplus IBM 1620), and priority interrupt.

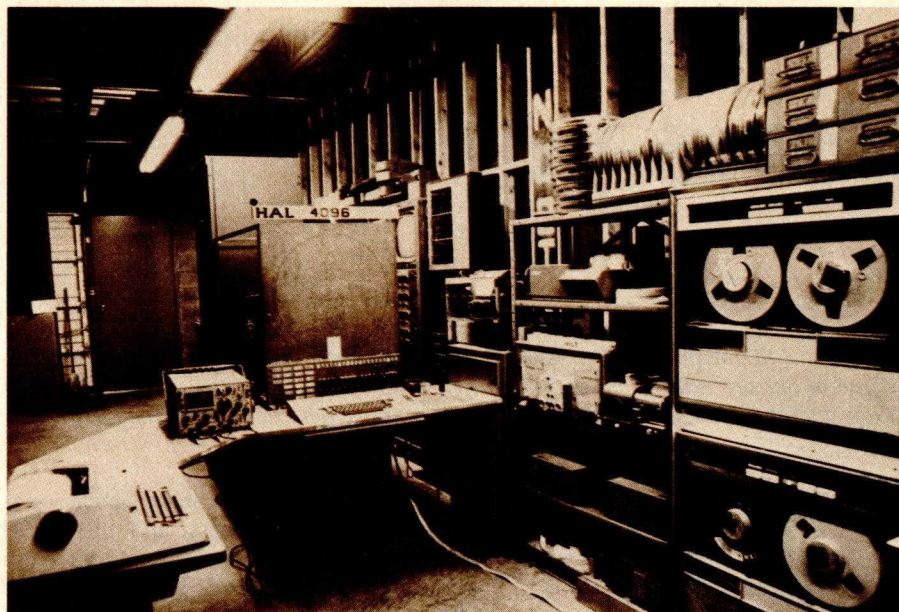

The First Ten Years of Amateur Computing

Sol Libes

President, Amateur Computer Group of New Jersey
995 Chimney Ridge
Springfield NJ 07081

If one could find a specific date for the birth of personal computing, it would be May 5 1966.

Most people I meet are under the mistaken notion that personal computing started only two or three years ago, with the introduction of the Altair 8800 by MITS. Nothing could be further from the truth. In fact, the amateur computing hobby was then almost ten years old.

I therefore decided to write this article to set the record straight, give credit to the early pioneers in this hobby and shed some light on the early history of microprocessors.

If one could find a specific date for the birth of personal computing, it would be May 5 1966. For it was on that date that Steven B Gray founded the Amateur Computer Society and began publishing a quarterly called the *ACS Newsletter*.

The newsletter exchanged information on where to get surplus computer gear, how to build not too complicated circuits, where to get integrated circuits, tips, experiences and where to get help. By the end of 1966, the Society reported that it had over 70 members.

1966 also saw the publication of the first books on how to build a home computer.

Typical was *We Built Our Own Computers* by A B Bolt and published by Cambridge University Press.

In January 1968, a survey in the *ACS Newsletter* reported that two amateurs had their home built systems up and running and that many others were actively working on their systems. The survey indicated that programmable memory sizes ranged from 4 to 8 K with some as high as 20 K, all magnetic core of course. Teletypes and Flexowriters were popular for IO. Clock speeds ranged from 500 kHz to 1 MHz, with the average 500 kHz. Most used discrete transistors, and a few reported using those new and hard to come by RTL integrated circuits. Instruction sets were small, ranging from 11 to 34 instructions. Word sizes were from four to 32 bits, with 12 bits the typical number. Registers ranged from two to 11, with three most common. Most reported that they had been working on their machines for about two years.

The April 1968 issue of *Popular Mechanics* reported on ECHO IV (Electronic Computing Home Operator), a home built computer constructed by Jim Sutherland. It had four registers, used a 4 bit word, had 8 K bytes of core memory, 18 instructions and a clock speed of 160 kHz.

In December 1968 Don Tarbell (now

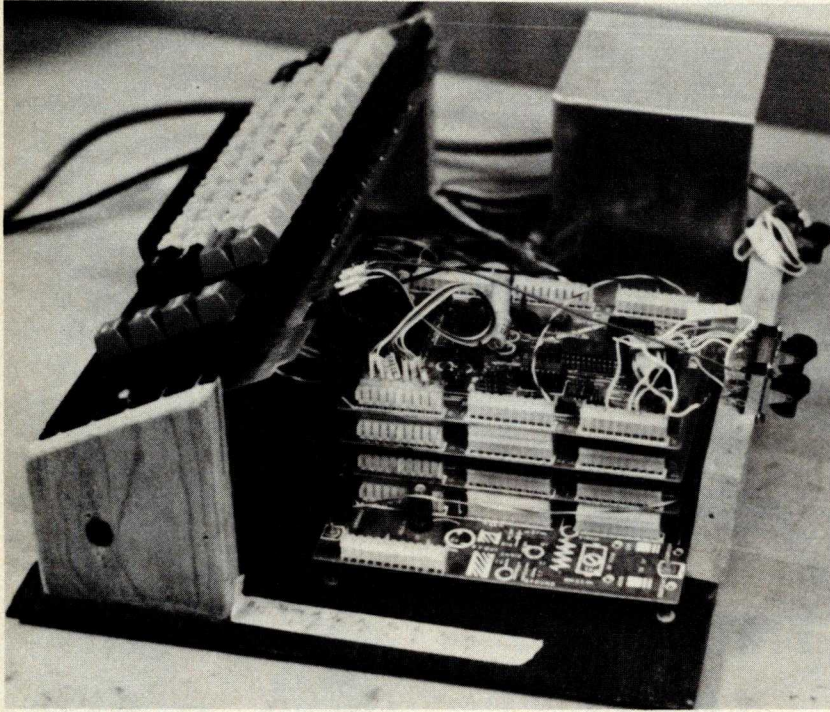


Photo 2: The author's TVT-1, designed by Don Lancaster and built in late 1973. Intended only as a TV typewriter, it was interfaced to a modem and used with an IBM timesharing system.

The first computer kit was introduced in 1971. It featured 52 TTL integrated circuits, a 32 by 8 bit programmable memory, and 15 instructions for \$503.

The Kenback-1 computer featured a 1 K byte MOS shift register memory made by a small, young manufacturer called Intel.

known for his high speed tape cassette interface) reported on his home built computer in the *ACS Newsletter*. It had a 4 bit word size, four registers, 10 kHz clock and was constructed using RTL integrated circuit logic. He used a Teletype for IO.

In 1967, Dave Digby ran an ad in *CQ* magazine offering a computer kit. It was advertised as featuring RTL logic, four registers, a 512 to 1024 byte delay line memory, and serial input and output. The price was \$1000. As far as I know, he never delivered any units.

Most early builders constructed copies of the Digital Equipment Corporation's PDP-8 minicomputer with their own modifications. In the surplus area, 1000 Minutemen I missile guidance processors became available in 1971.

1971 also saw the introduction of the first computer kit. It was part of the National Radio Institute's course on computer electronics. It used 52 TTL integrated circuits, had a 32 by 8 bit integrated circuit memory, 15 instructions and an operator's panel, and it sold for \$503. Louis E Frenzel, then of NRI and now at Heathkit, was the designer.

In late 1971, the Kenback Corporation

introduced the Kenback-1 computer for \$750. It was intended primarily for educational use. It had a 1 K byte MOS shift register memory made by a small, young integrated circuit manufacturer called Intel. It also had three registers, an 8 bit word size, 65 instructions, operator's panel, and an audio cassette for program storage.

The December 1971 issue of *Computers and Automation* described five home built computer systems. And by the end of the year 1971, there were reported to be 195 members in the Amateur Computer Society.

In 1972 things continued to pick up. In June Don Tarbell reported that he had written an editor program for his new home built system and was working on an assembler program. His system used an 8 bit word, 16 registers, and 4 K bytes of core memory.

Early 1972 saw the introduction of the 8008 microprocessor, by Intel, the opening of a number of used computer equipment stores, large price drops in TTL logic and the availability of the 1101 programmable memory at low cost. All of this proved to be a tremendous stimulus for amateur computer experimenters.

In the September 1972 issue of the *ACS Newsletter* Hal Chamberlin reported on his home built HAL-4096. This 16 bit machine utilized surplus IBM 1620 core memories. Hal furnished a complete set of construction plans for \$2. The system had 16 registers, priority interrupt, Selectric and paper tape IO, and many other very advanced features.

The September 14 1972 issue of *Electronic Design* carried an article on how to build a circuit which would display 1024 ASCII characters on a TV set.

In 1973 amateur computing advanced in several areas. In May, the EPD company advertised the System One computer kit for \$695. It had 1 K bytes of memory with expansion to 8 K and contained 82 integrated circuits. It had 57 instructions encoded in a diode matrix read only memory.

The September 1973 issue of *Radio Electronics* published Don Lancaster's plans for the construction of the TVT-1. Although intended as a TV typewriter, many enterprising experimenters interfaced it to modems and home built computers.

In late 1973, the Scelbi Computer Consulting Company introduced the first computer kit using a microprocessor. The kit was called the Scelbi-8H and it sold for \$565. It used the Intel 8008 and had

1 K bytes of integrated circuit programmable memory. It was expandable to 16 K bytes of programmable memory (\$2760) and had options such as cassette IO, ASCII keyboard input, oscilloscope output and serial IO.

In 1973, Digital Equipment Corporation offered the PDP-8A with 1 K words of 12 bit programmable memory for \$875. Also in 1973, a small publishing house catering to computer and digital electronics hobbyists began publishing with a book on wire wrap construction techniques. It was called M P Publishing Company and was a part time activity of Carl Helmers (who later began a monthly called *Experimenters' Computer System* which after five issues was transformed into BYTE in 1975).

1974 marked a year of substantial increase in amateur computing. In July, *Radio-Electronics* magazine carried a construction article by Jonathan Titus on building the Mark-8 processor, which used the Intel 8008 microprocessor. It is estimated that over 500 of these units were built by avid experimenters.

In October, Southwest Technical Products Company (SwTPC) introduced the TVT-II kit for \$180 and an ASCII keyboard kit for \$40.

In September, Hal Singer started the *Micro-8 Newsletter* to exchange information

among hundreds of experimenters who were building the Mark-8 unit.

In November 1974, Hal Chamberlin and some associates began another very popular but short-lived magazine called *The Computer Hobbyist*.

1975 was the year that personal computing exploded. It began, in January, when *Popular Electronics* carried an article on the Altair 8800 microcomputer by MITS. First deliveries were in April 1975. The kit sold for \$375 and included 1 K bytes of programmable memory, but no IO. MITS claims that by the end of 1976 they had sold over 10,000 Altair 8800s (80% to hobbyists).

In April, the first computer club held its meeting. Started by Bob Reiling and Gordon French, and calling itself The Homebrew Computer Club, it met in Menlo Park CA. One month later the Amateur Computer Group of New Jersey was formed.

In the fall of 1975, MITS released its 4 K and 8 K BASIC interpreters, SwTPC introduced their 6800 based microcomputer, and the first decade of amateur computing was complete. Since then, the field as we know it today has rapidly matured and expanded.

Some Microprocessor History

Intel Corporation must be credited with developing the microprocessor, the single chip integrated circuit which performs the basic functions of a central processing unit.

In 1969, a Japanese company, Busicom, contracted with Intel to develop a chip set for a printer-calculator. It used a 4 bit data bus and consisted of four integrated circuits in a set: a processor, read only memory with IO, programmable memory with IO, and a shift register type memory. Busicom permitted Intel to market the chip set for noncalculator applications, and the first generation of microprocessors was born.

The processor chip was designated the 4004, and it sold for \$200. It came in an 18 pin dual in line package (DIP) and would interface only with the other chips in the family. Programs had to be stored in the erasable read only memory. Data and address information was multiplexed on the 4 bit bus. Since program could only be executed out of read only memory, and since programmable memory was used only to store data, debugging software proved to be difficult. Further, a great deal of support logic was required.

At nearly the same time, Datapoint, a manufacturer of intelligent terminals, contracted with Intel and Texas Instruments to produce a true processor on a

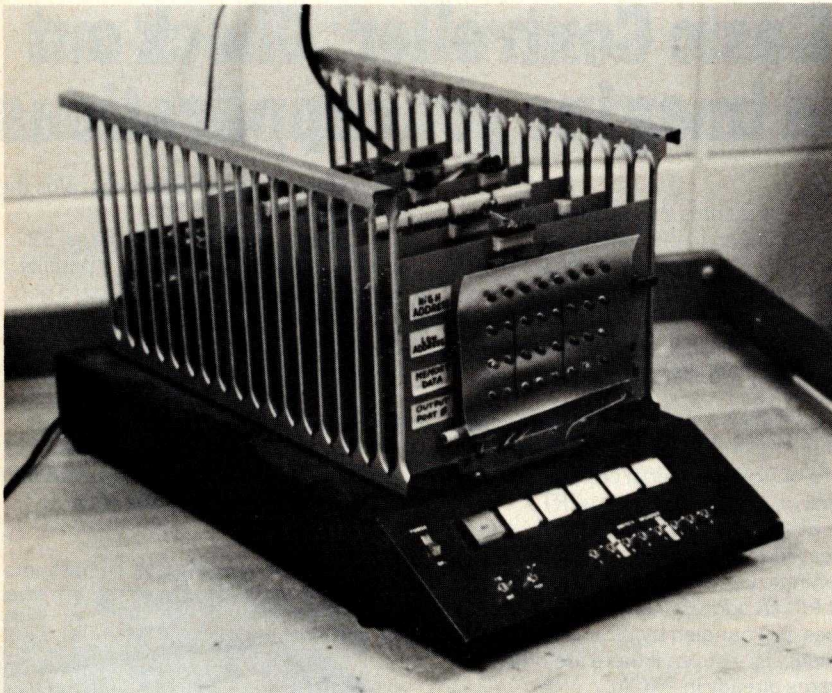


Photo 3: The author's Mark-8 processor, built in late 1974. Designed by Jonathan Titus, it uses the Intel 8008 microprocessor and has 1 K bytes of programmable memory.

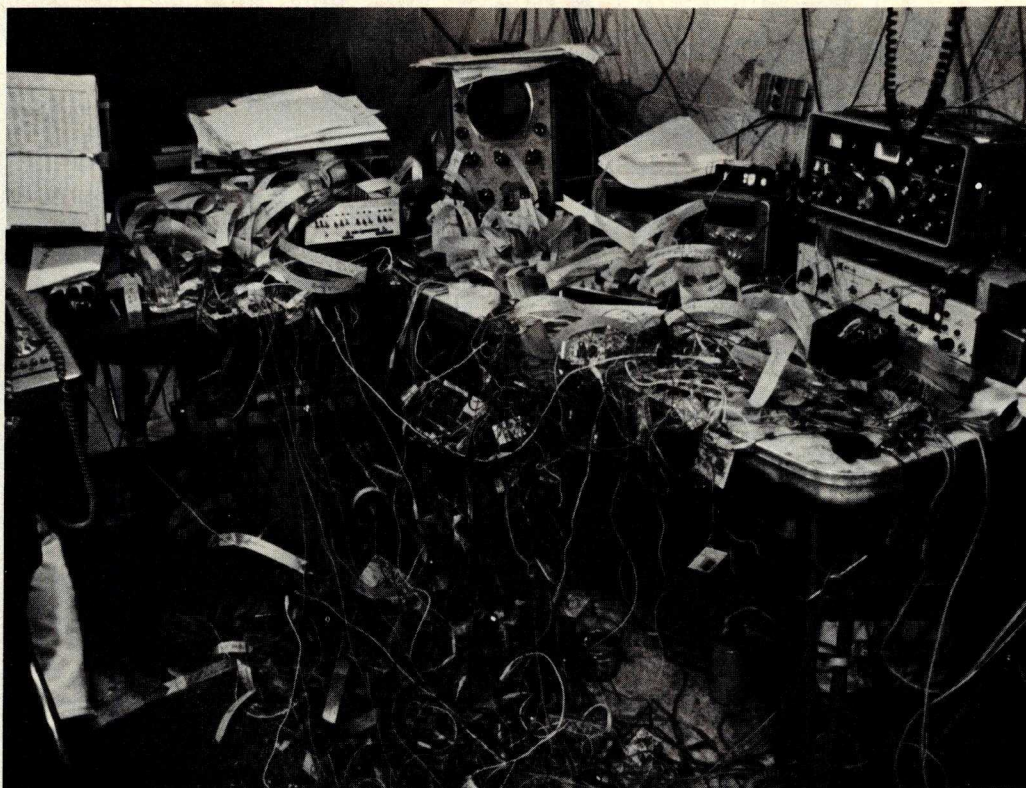


Photo 4: Roger Amidon's 4 bit processor, built in 1972 and fondly referred to as the "Spider." It was built with TTL logic and used to control an amateur radio (RTTY). The Spider was featured on the cover of April 1977 BYTE.

chip. Intel succeeded in doing this. Unfortunately, the device proved to be too slow for Datapoint's use. Intel decided, therefore, in 1971, to market the device for \$200 and call it the 8008. It marked the first generation of "true" microprocessor integrated circuits.

The 8008 used an 8 bit data word with a more powerful instruction set than the 4004, but it still had many of the disadvantages of the 4004. It required considerable support logic. The 8008 however was a more general purpose device. For example, it contained a set of logical operations that the 4004 did not have. Its instruction set was similar to a minicomputer's, and it could directly address 16 K bytes of programmable memory. It even had interrupt capability.

At the same time, Intel introduced the 1101, a 256 by 1 bit programmable memory (which enabled the experimenter to build a 1 K by 8 bit memory with only 32 integrated circuits!), and the 1702 256 by 8 bit EROM. With the 8008, 1101 and 1702 integrated circuits, general purpose computers could now be built.

In 1972 several other manufacturers recognized this emerging market. Most notable was National Semiconductor who introduced the IMP-16, a chip set which may have been a little ahead of its time. It was a bit slice system of variable word

length and user definable instruction set. It later developed into the third generation Pace microprocessor.

In late 1973, Intel introduced the 8080 processor, and, soon after, Motorola introduced the 6800. The 8080 has become the de facto industry standard, used in more applications than any other processor. The 8080 is basically an enhancement of the 8008. It came in a 40 pin dual in line package and could directly address 64 K bytes of programmable memory and read only memory. It had a true bidirectional data bus and an expanded instruction set. However, it still required an external clock and multiple power supplies. The 6800 on the other hand required only one TTL compatible power supply, had simpler control circuitry, and an instruction set more compatible with larger computers.


1975 and 1976 saw the introduction of enhanced third generation microprocessors. The Zilog Z-80, an enhanced 8080, featured a larger instruction set, more registers, on chip clock, and more. The 6502, from MOS Technology, was an enhancement of the 6800. The Texas Instruments TMS9900 and TMS9980 became the first widely available single chip 16 bit microprocessors.

1977 marked the introduction of the fourth generation of microprocessors. In fact, these devices now could be called

microcomputers in a single integrated circuit. These new devices include the complete microprocessor, read only memory, programmable memory, and IO circuitry on one chip. A minimum of support logic is required.

The future promises an increase in word size, functions, speed and memory capacity. (It looks like the single chip processor that runs BASIC may soon be a reality.) The next ten years in microprocessors and personal computing should be even more amazing than the past decade. ■

Photo 5: The Scelbi-8H processor. This was the first kit to utilize a microprocessor. It employed an Intel 8008 processor and was introduced in late 1973; design work began on the unit in August 1972. The prototype featured an oscilloscope display and audio tape unit. Scelbi has since discontinued their hardware line to concentrate on software and applications publications. The last Scelbi-8H was sold in December 1974.

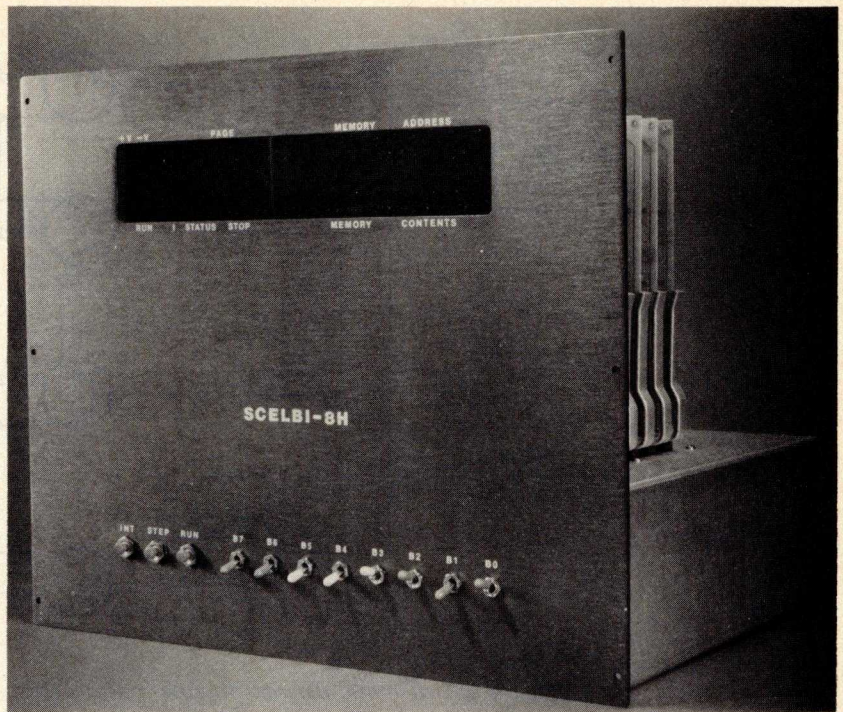

TURTLES

Small home robots
controllable by **your** computer.

Attachable to any computer via parallel interface (not included)


Terrapin™ Turtles can:

- 'walk' (on 2" radius wheels)
- 'talk' (via 2-tone speaker)
- 'blink' (with lights as eyes)
- 'draw' (with solenoid-controlled pen)
- 'feel' (using 3½" radius dome as touch sensor)

Use your **Turtle** to map rooms, solve mazes, dance, explore Artificial Intelligence, teach geometry or programming.

A unique peripheral to keep you "in touch" with your computer.

Limited delivery from stock • Brochures available

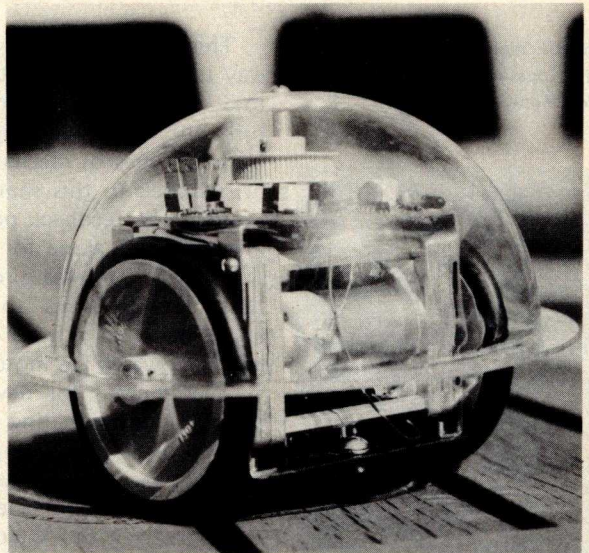

Kit \$300 Assembled \$500

S-100 Interface \$40 Shipping \$5

Mass. residents add 5% sales tax

Terrapin, Inc.



33 Edinborough Street, 6th Floor
Boston, MA 02111
(617) 482-1033